

Buzzer, Magnetic

SB015PM-12054-T75

Description

A magnetic SMD buzzer is an electronic device that produces a sound when an electrical signal is applied to it. The function of a magnetic buzzer is to provide an audible alert or notification in various electronic devices such as alarms, timers, and electronic toys. The buzzer consists of a coil of wire and a magnet that vibrate when an alternating current is passed through the coil.



Applications

- Electronic devices
 - Industrial and commercial equipment
 - Home appliances
 - Toys and games
 - Sound effects
 - Audio Alerts
 - Warning Signals
 - Audio Feedback
- Electronic devices
 - Industrial and commercial equipment
 - Home appliances
 - Toys and games
 - Sound effects
 - Audio Alerts
 - Warning Signals
 - Audio Feedback

Active / Passive

Features


| Item | Specification | Unit | Condition |
|-----------------------|---------------|------|-----------|
| Oscillation frequency | 2048 | Hz | |
| Operating voltage | 1~3 | Vo-p | |
| Rated voltage | 1.5 | Vo-p | |

Buzzer, Magnetic

SB015PM-12054-T75

| | | | |
|------------------------------|-------------------|----|--------------------------|
| Coil resistance | 16±3 | Ω | |
| Current consumption | MAX.40 | mA | at Rated Voltage |
| Sound pressure level | MIN.75 | dB | at 10cm at Rated Voltage |
| Operating temperature | -20~ +60 | °C | |
| Storage temperature | -30 ~ +70 | °C | |
| Dimension | Φ12 x H5.4 | mm | See appearance drawing |
| Housing material | PPO(Black) | | |
| Leading pin | Tin plated copper | | See appearance drawing |
| Certifications | RoHS | | |

Appearance drawing

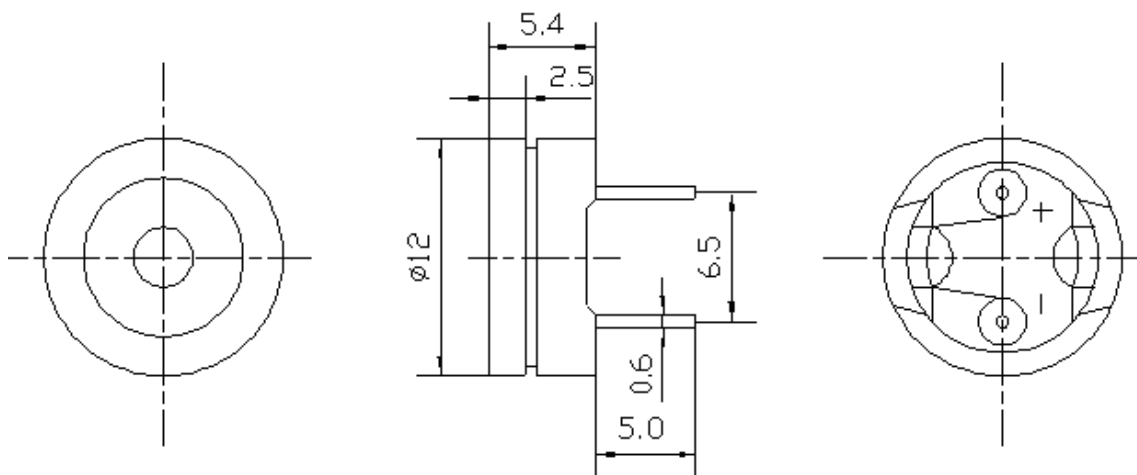

Tol : ± 0.3 Unit: mm

Testing method

Standard Measurement conditions


Temperature: 25±2°C

Humidity: 45-65%


Acoustic Characteristics

The oscillation frequency, current consumption and sound pressure are measured by the measuring instruments at 10 cm

Typical Frequency Response Curve

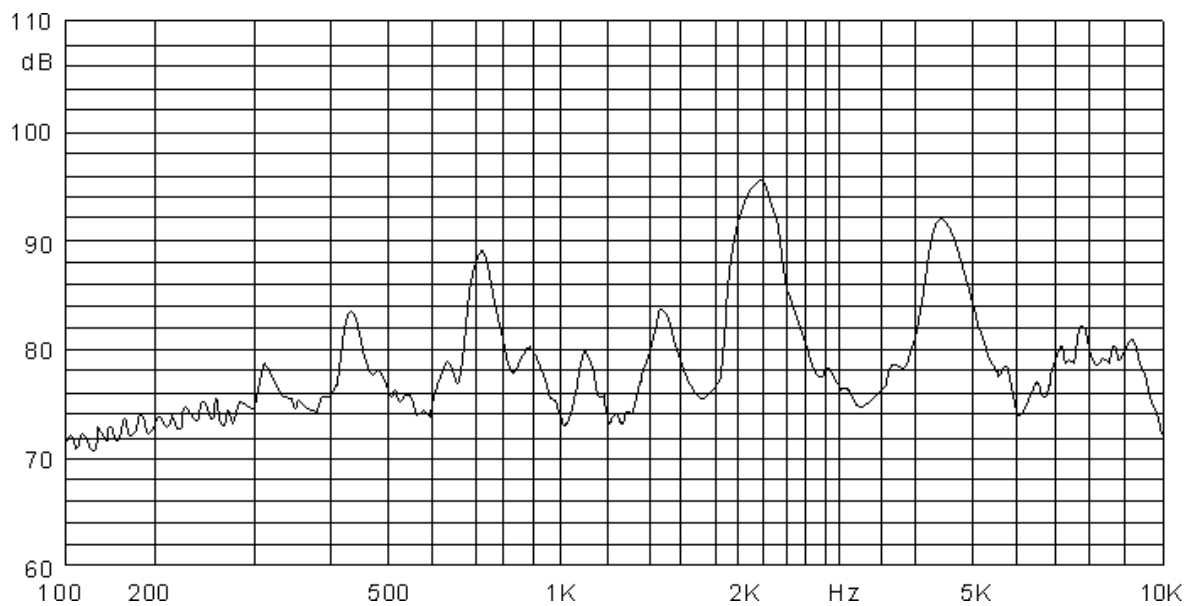

Reliability test
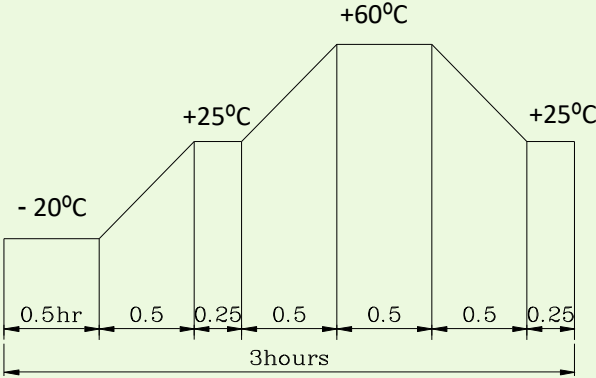
| Item | Test condition and requirement |
|--|--|
| High Temperature Test (Storage) | After being placed in a chamber with 70±2°C for 96 hours and then being placed in normal condition for 2 hours. Allowable variation of SPL after test: ±10dB. |
| Low Temperature Test (Storage) | After being Placed in a chamber with -30±2°C for 96 hours and then being placed in normal condition for 2 hours. Allowable variation of SPL after test: ±10dB. |
| Humidity Test | After being Placed in a chamber with 90-95% R.H. at 40±2°C for 96 hours and then being placed in normal condition for 2 hours. Allowable variation of SPL after test: ±10dB. |
| Temperature Cycle Test | <p>The part shall be subjected to 5 cycles.</p> <p>One cycle shall be consist of :</p>  <p>Allowable variation of SPL after test: ±10dB.</p> |
| Drop Test | Drop on a hard wood board of 4cm thick, any directions ,6 times, at the height of 75cm. Allowable variation of SPL after test: ±10dB. |
| Vibration Test | After being applied vibration of amplitude of 1.5mm with 10 to 55 Hz band of vibration frequency to each of 3 perpendicular directions for 2 hours. Allowable variation of SPL after test: ±10dB. |
| Solderability Test | Lead terminals are immersed in rosin for 5 seconds and then immersed in solder bath of +300±5°C for 3±1 seconds. 90% min. lead terminals shall be wet with solder (Except the edge of terminals). |

Buzzer, Magnetic

SB015PM-12054-T75

Terminal Strength Pulling Test

The force of 9.8N(1.0kg) is applied to each terminal in axial direction for 10 seconds. No visible damage and cutting off.

Test condition


Standard Test Condition

Temperature: +5 ~ +35°C
 Humidity: 45 - 85%
 Pressure: 860 – 1060 mbar

Judgment Test Condition

Temperature: +25 ± 2°C
 Humidity: 60 - 70%
 Pressure: 860 - 1060mbar

Package

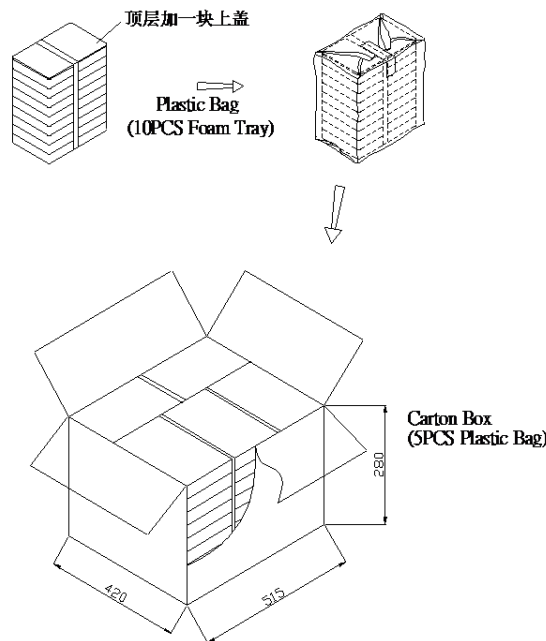

| | | |
|-------------|-------------------|-------------------|
| Foam Tray | 240mmx160mm | 1x100PCS=100PCS |
| Plastic Bag | | 10x100PCS=1000PCS |
| Carton Box | 420mmx515mmx280mm | 5x1000PCS=5000PCS |

Part number

SBXXXXX-XXX-XX

| | |
|-------|------------------|
| SB | Buzzer |
| XXX | Rated power |
| X | Passive / Active |
| X | Piezo / Magnetic |
| XXXXX | Size |
| X | THT / SMD |
| XX | dB @ rated power |

Ordering information

Ordering can be done via www.summit-electronics.com or via info@summit-electronics.com. Please contact us for more information. Customisation of the product is available on request.

Technical support

For all product questions please contact us via info@summit-electronics.com

Document revision

| Rev | Date | changes |
|--------|------------|-------------------------|
| V01.00 | 06-04-2023 | First issue of document |