

Buzzer, Magnetic

SBM050AM-12095-T88

Description

A magnetic SMD buzzer is an electronic device that produces a sound when an electrical signal is applied to it. The function of a magnetic buzzer is to provide an audible alert or notification in various electronic devices such as alarms, timers, and electronic toys. The buzzer consists of a coil of wire and a magnet that vibrate when an alternating current is passed through the coil.



Applications

- Electronic devices
- Industrial and commercial equipment
- Home appliances
- Toys and games
- Sound effects
- Audio Alerts
- Warning Signals
- Audio Feedback
- Electronic devices
- Industrial and commercial equipment
- Home appliances
- Toys and games
- Sound effects
- Audio Alerts
- Warning Signals
- Audio Feedback

Features


Item	Specification	Unit	Condition
Oscillation Frequency	2300±300	Hz	
Operating Voltage	2.5-7	Vdc	
Rated Voltage	5	Vdc	
Current Consumption	MAX. 30	mA	at Rated Voltage

Buzzer, Magnetic

SBM050AM-12095-T88

Sound Pressure Level	MIN. 88	dB	at 10 cm at Rated Voltage
Operating Temperature	-30~ +70	°C	
Storage Temperature	-35 ~ +80	°C	
Dimension	Φ12 x H9.5	mm	See appearance drawing
Certification	RoHS		
Housing Material	PBT (BLACK)		
Pin	Tin plated copper		

Appearance drawing

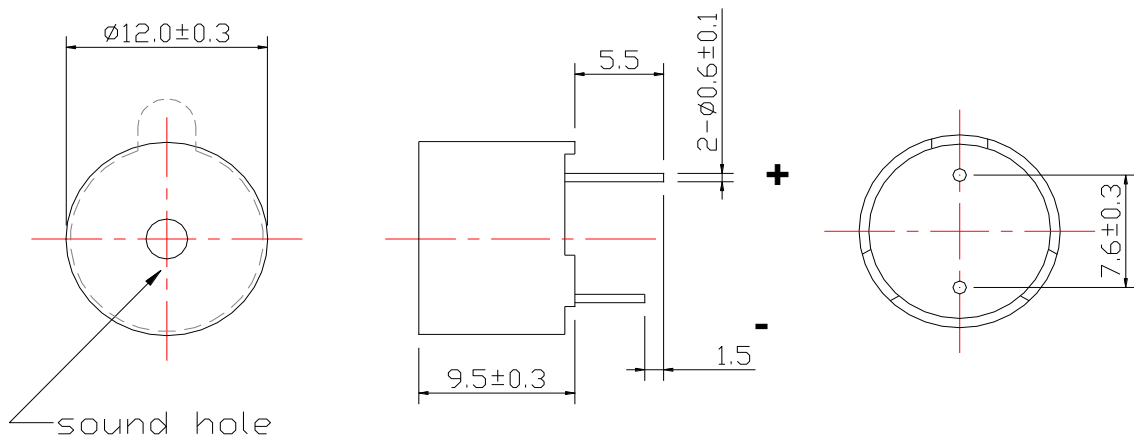

Tol : ± 0.5 Unit: mm

Testing method

Standard Measurement conditions

Temperature: 25 ± 2°C

Humidity: 45 - 65%

Buzzer, Magnetic


SBM050AM-12095-T88



Acoustic Characteristics


The oscillation frequency, current consumption and sound pressure are measured by the measuring instruments at 10 cm.

Typical Frequency Response Curve

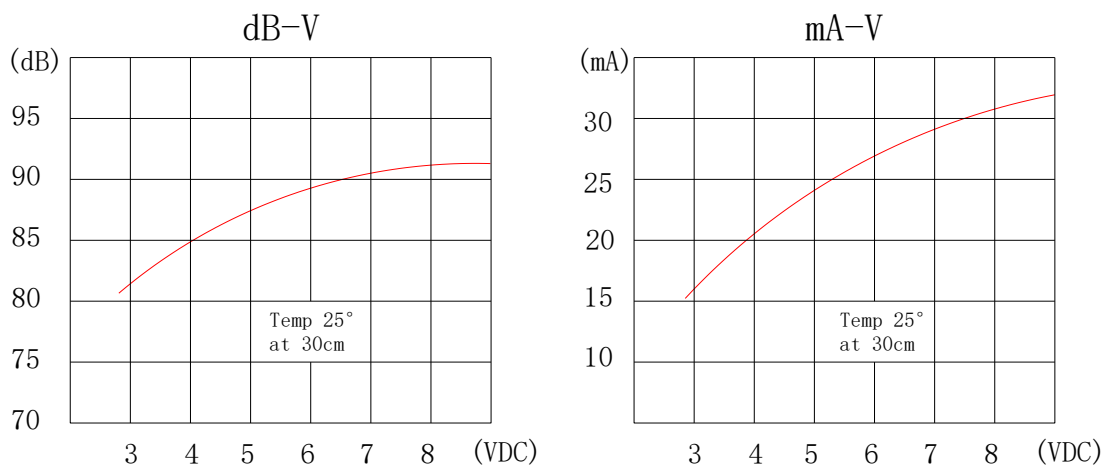

RELIABILITY TEST

Item	Test condition and requirement
High Temperature Test (Storage)	After being placed in a chamber with 80±2°C for 96 hours and then being placed in normal condition for 2 hours. Allowable variation of SPL after test: ±10dB.
Low Temperature Test (Storage)	After being Placed in a chamber with -30±2°C for 96 hours and then being placed in normal condition for 2 hours. Allowable variation of SPL after test: ±10dB.
Humidity Test	After being Placed in a chamber with 90-95% R.H. at 40±2°C for 96 hours and then being placed in normal condition for 2 hours. Allowable variation of SPL after test: ±10dB.
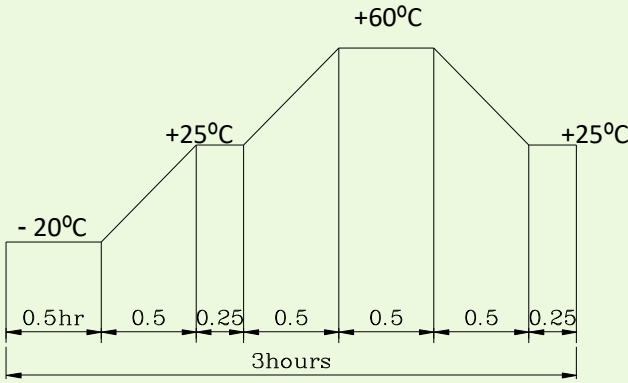
<p>Temperature Cycle Test</p>	<p>The part shall be subjected to 5 cycles. One cycle shall be consist of :</p>  <p>Allowable variation of SPL after test: $\pm 10\text{dB}$.</p>
<p>Drop Test</p>	<p>Drop on a hard wood board of 4cm thick, any directions ,6 times, at the height of 75cm .</p> <p>Allowable variation of SPL after test: $\pm 10\text{dB}$.</p>
<p>Vibration Test</p>	<p>After being applied vibration of amplitude of 1.5mm with 10 to 55 Hz band of vibration frequency to each of 3 perpendicular directions for 2 hours .</p> <p>Allowable variation of SPL after test: $\pm 10\text{dB}$.</p>
<p>Solderability Test</p>	<p>Lead terminals are immersed in rosin for 5 seconds and then immersed in solder bath of $+235^{\circ}\text{C}$-$+250^{\circ}\text{C}$ for 10 seconds .</p> <p>90% min. lead terminals shall be wet with solder (Except the edge of terminals).</p>
<p>Terminal Strength Pulling Test</p>	<p>The force of 9.8N(1.0kg) is applied to each terminal in axial direction for 10 seconds.</p> <p>No visible damage and cutting off.</p>

Buzzer, Magnetic

SBM050AM-12095-T88

Test Condition


Standard Test Condition

Temperature:	+5 ~ +35°C
Humidity:	45 - 85%
Pressure:	860 - 1060mbar

Judgment Test Condition

Temperature:	+25 ± 2°C
Humidity:	60 - 70%
Pressure:	860 - 1060mbar

Packing

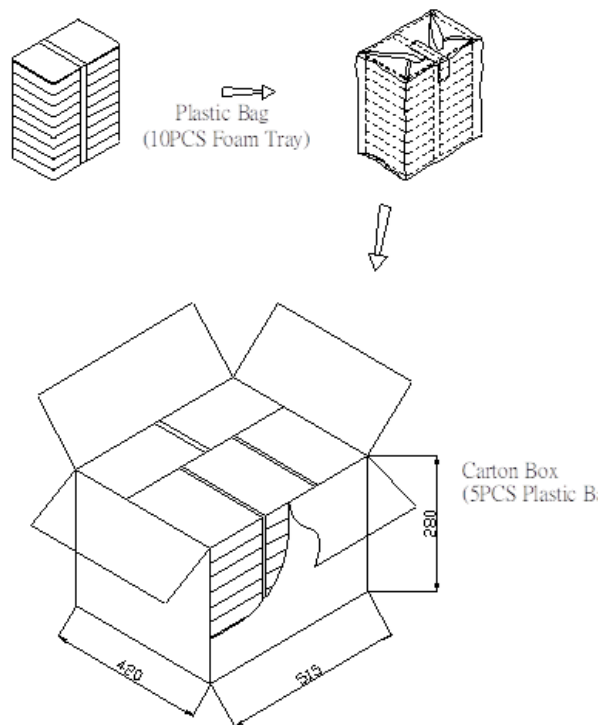

Foam Tray	240mmx160mm	1x100PCS=50PCS
Plastic Bag		10x100PCS=1000PCS
Carton Box	420mmx515mmx280mm	5x1000PCS=5000PCS

Part number

SBXXXXX-XXX-XX

SB	Buzzer
XXX	Rated power
X	Passive / Active
X	Piezo / Magnetic
XXXXX	Size
X	THT / SMD
XX	dB @ rated power

Ordering information

Ordering can be done via www.summit-electronics.com or via info@summit-electronics.com. Please contact us for more information. Customisation of the product is available on request.

Technical support

For all product questions please contact us via info@summit-electronics.com

Document revision

Rev	Date	changes
V01.00	06-04-2023	First issue of document