


RF Cable, SMA-F RP~SMA-M RP ERF5040,

Description

The ERF5040 is a RF-Cable suitable for RF applications. the cable has 2 SMA reversed polarity connectors, a female and a male. It can be used for RF cable assemblies, and as an add-on for antenna's. The length of the RF cable can be adapted on request.

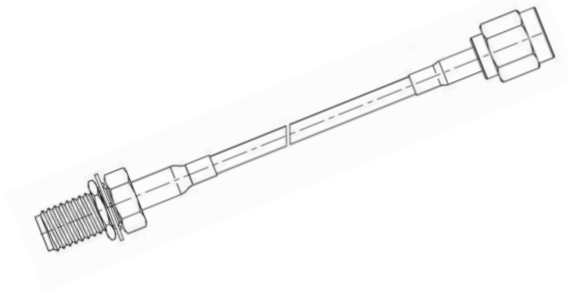

Typical applications

- RF Cable assembly
- Antenna accessory



Features

Mechanical Properties

Connector Type: Reversed polarity SMA Male & Reversed polarity SMA Female

Cable Length: 600 mm ± 3

Cable type: RG-174

Operating Temperature Range: -20°C~+75°C


Storage Temperature Range: -40°C~+80°C

Dimensions

*unit: mm

Part	Description	Material	Finish	QTY
1	RP-SMA Female	Brass	Gold plating	1
2	RG174	PVC	Black	1
3	RP-SMA Male	Brass	Gold plating	1
4	Heat shrink tube	PVC	Black	1

RF Cable, SMA-F RP~SMA-M RP ERF5040,

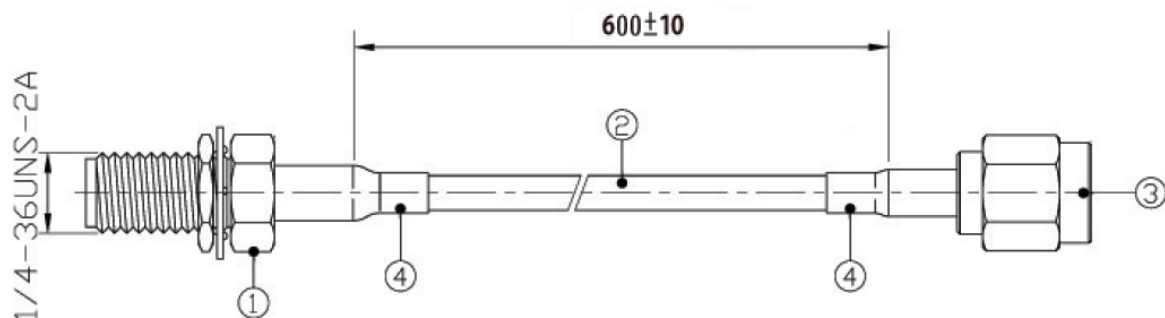

Connector



SMA Male



SMA Female



RP-SMA Male



RP-SMA Female

The ERF5040 uses a RP-SMA Male and RP-SMA Female connector.

Ordering information

Ordering can be done via www.summit-electronics.com or via info@summit-electronics.com. Please contact us for more information. Customisation of the product is available on request.

Technical support

For all product questions please contact us via info@summit-electronics.com

Document revision

Rev	Date	changes
V01.00	17-07-2023	First issue of document, EK