
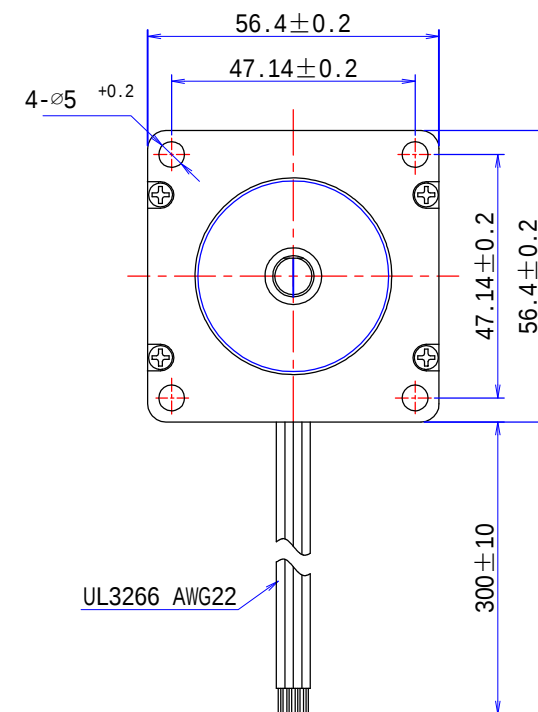
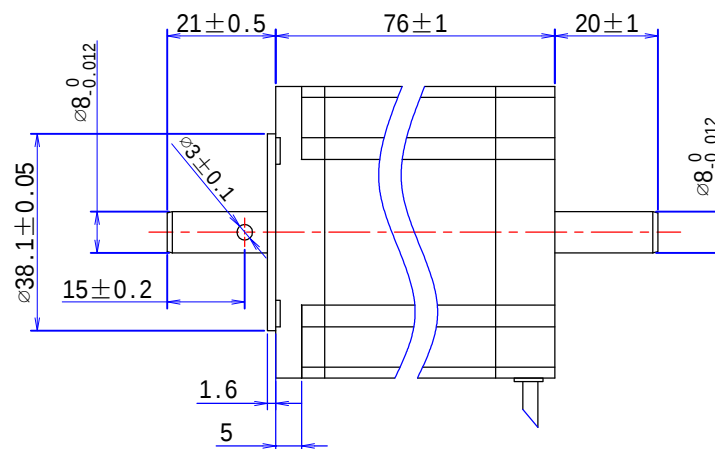


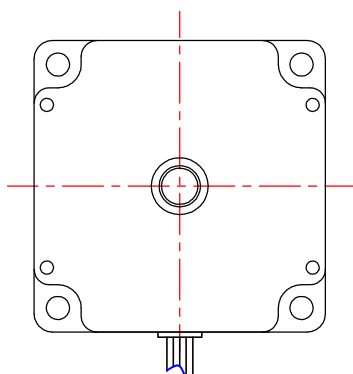


Exciting Sequence vs. Direction of Rotation

STEP	A+	A-	B+	B-	
1	+	+	-	-	CW ↓ ↑ CCW
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

Clockwise view from mounting side

Wiring diagram



Specifications:

Step angle	1.8° ±5%
Phase	2 Phase
Rated voltage	3.0 V
Rated current	3.0 A
Inductance	1.0 Ω ±10%/Phase (At 20°C)
Step angle	3.2 mH ±20%/Phase
Hold torque	1.8 N.m Min
Insulation	B
Rotor inertia	470 g.cm ²
Weight	1.0 Kg

					SSM57076-200
		First Edition	----	2016-05-17	
	Change no.	Change Content			Summit Electronics bv
Design Date	2016-05-17, Yoeng	Scale	1:1	view	
Review		Units	mm		
Designer		Version	A		
Approval		Page	1/1		