

1W, DC/DC Power Converter

SDM01N

SUMMIT
ELECTRONICS



Introduction

The SDM01N series are DIP8 package DC/DC converters with unregulated single output, and 1.5KVDC isolation. These converters feature high efficiency, low ripple and noise, continuous short circuit protection, and wide operating temperature range. They are widely used in distributed power system in industrial applications where isolation and voltage converting is needed.

Features

- Rated power: 1W Max
- Input voltage range $\pm 10\%$
- Unregulated single output
- High efficiency, up to 89%
- Small no load input current
- Isolation voltage 1.5KVDC
- Operating temperature range: $-40 \sim +105^{\circ}\text{C}$ ambient
- RoHS compliant
- Compact DIP8 package
- Continuous short circuit protection
- Meet UL/EN/IEC 62368-1
- 3 year warranty

1W, DC/DC Power Converter

SDM01N



Part numbers

Model Number	Input Voltage [VDC] $\pm 10\%$	Output Voltage (VDC)	Output Current (mA) Max	Output Current (mA) Min	Efficiency (%) Typ.	Capacitive Load (uF) Max.
SDM01N0303	3.3	3.3	303	30	80	3000
SDM01N0305	3.3	5	200	20	82	3000
SDM01N0309	3.3	9	111	12	83	1200
SDM01N0312	3.3	12	84	9	84	820
SDM01N0503	5	3.3	303	30	82	3000
SDM01N0505	5	5	200	20	85	3000
SDM01N0509	5	9	111	12	86	1200
SDM01N0512	5	12	84	9	86	820
SDM01N0515	5	15	67	7	86	680
SDM01N0524	5	24	42	4	87	330
SDM01N1203	12	3.3	303	30	82	3000
SDM01N1205	12	5	200	20	85	3000
SDM01N1209	12	9	111	12	86	1200
SDM01N1212	12	12	84	9	86	820
SDM01N1215	12	15	67	7	86	680
SDM01N1224	12	24	42	4	88	330
SDM01N1505	15	5	200	20	86	3000
SDM01N1512	15	12	84	9	87	820
SDM01N1515	15	15	67	7	88	680
SDM01N2403	24	3.3	303	30	82	3000
SDM01N2405	24	5	200	20	85	3000
SDM01N2409	24	9	111	12	86	1200
SDM01N2412	24	12	84	9	87	820

1W, DC/DC Power Converter

SDM01N



SDM01N2415	24	15	67	7	87	680
SDM01N2424	24	24	42	5	88	330

* Only typical models are listed. Other models may be available upon request.

* See SDM01N series for 3KVDC isolation models.

1W, DC/DC Power Converter

SDM01N



Electrical characteristics

Unless otherwise indicated, specifications are measured at $T_A=25^{\circ}\text{C}$, nominal input voltage, full load after warm up.

Parameter	Condition	Min.	Type	Max.	Unit	Note
Input current Full load	$V_{IN}=3.3\text{V}$	-	370	-	mA	
	$V_{IN}=5, 9\text{V}$		230			
	$V_{IN}=12\text{V}$		98			
	$V_{IN}=15\text{V}$		79			
	$V_{IN}=24\text{V}$		50			
Input current No load		-	5	15	mA	
Reflected Ripple Current		-	15	-	mA	
Surge voltage 1 second max	$V_{IN}=3.3, 5\text{V}$	-0.7	-	9	VDC	
	$V_{IN}=9\text{V}$	-0.7		12		
	$V_{IN}=12, 15\text{V}$	-0.7		18		
	$V_{IN}=24\text{V}$	-0.7		30		
Output voltage accuracy	All models	Refer to graphic in “Characteristic Curves” section				
Line regulation For V_{IN} change of $\pm 1\%$	$V_{OUT}=3.3\text{V}$	-	-	± 1.5	%	
	All others			± 1.2		
Load regulation $I_{OUT}=10\%$ to 100% of I_{OUT} , rated	$V_{OUT}=3.3\text{V}$	-	8	20	%	
	$V_{OUT}=5\text{V}$		5	15		
	Others		3	10		
Temperature coefficient	Full load	-	± 0.02	-	$\%/^{\circ}\text{C}$	

1W, DC/DC Power Converter

SDM01N



Output ripple and noise	20MHz bandwidth	-	45	100	mVp-p	
Output short circuit protection		Continuous, automatic recovery				
Input filter		Capacitor				
Hot plug		None				

* Operating with less than 10% of rated load will not cause permanent damage to the converters, but the performances data may not fall into the specifications, and reliable operating is not assured.

1W, DC/DC Power Converter

SDM01N



General Specifications

Parameters	Condition	Min.	Typ.	Max.	Unit
Isolation voltage 1 minute, leakage current 1mA max	I/P to O/P	1500	-	-	VDC
Isolation resistance Tested at 500VDC	I/P to O/P	1000	-	-	M ohm
Isolation capacitance 100KHz, 0.1V	I/P to O/P	-	20	-	pF
Operating temperature	See "Derating Curve"	-40	-	+105	°C
Storage temperature		-55	-	+125	°C
Temperature rise at case	Full load	-	25	-	°C
Storage humidity	Non-condensing	-	-	95	%RH
Switching frequency	Full load	-	220	-	KHz
Pin soldering resistance 1.5mm away from case for 10 sec		-	-	300	°C
Vibration		10-150Hz, 5G, 0.75mm along X, Y and Z			
Case material		Black plastic UL94-V0			
Cooling method		Free air convection			
Design based on standards		UL/EN/IEC 62368-1			
Safety certifications		EN/IEC 62368-1			
EMC	Emissions	CISPR32, EN55032 Class B*			
	Immunity	IEC/EN61000-4-2			

1W, DC/DC Power Converter

SDM01N



MTBF	MIL-HDBK-217F	>3,500,000 Hours, T _A =25°C
Size & Weight		12.6 x 10 x 8 mm, 1.8g Typ.
Weight		2.4g Typ.

*External circuit is required in order to meet Class B, refer to Figure 2 in Recommended External Circuit.

1W, DC/DC Power Converter


SDM01N




Characteristics Curves

Derating Curve

Output vs Ambient Temperature

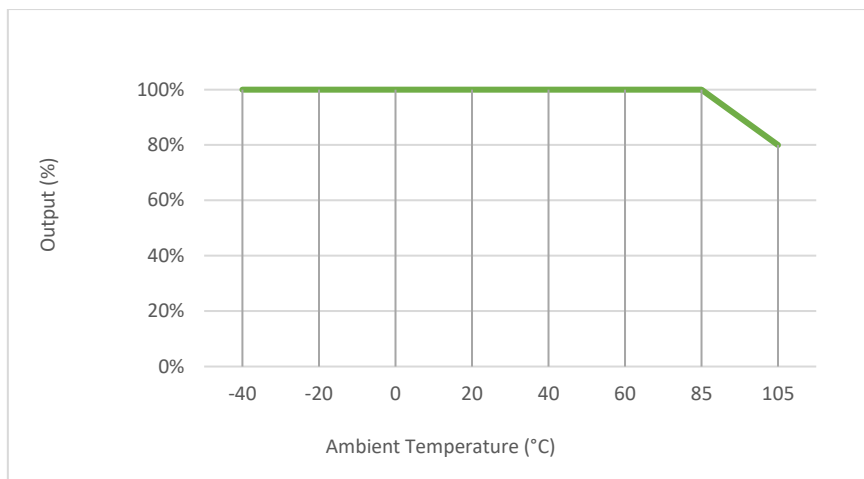


Output Voltage Accuracy vs Load

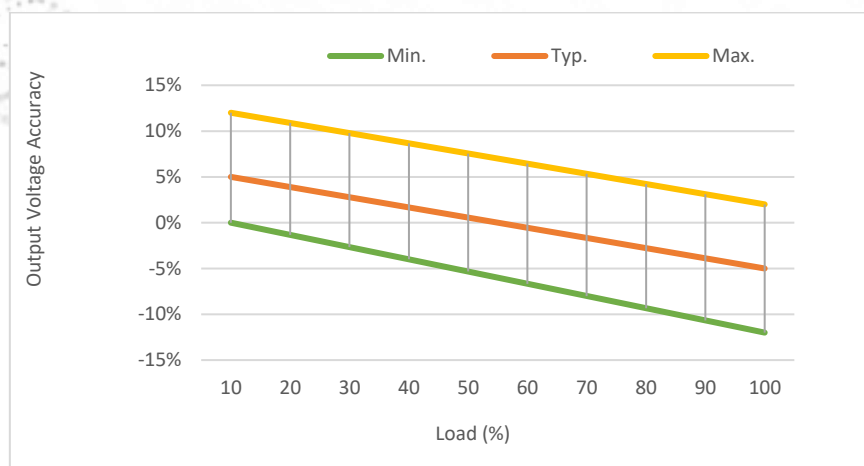

$V_{OUT}=3.3V$

1W, DC/DC Power Converter


SDM01N

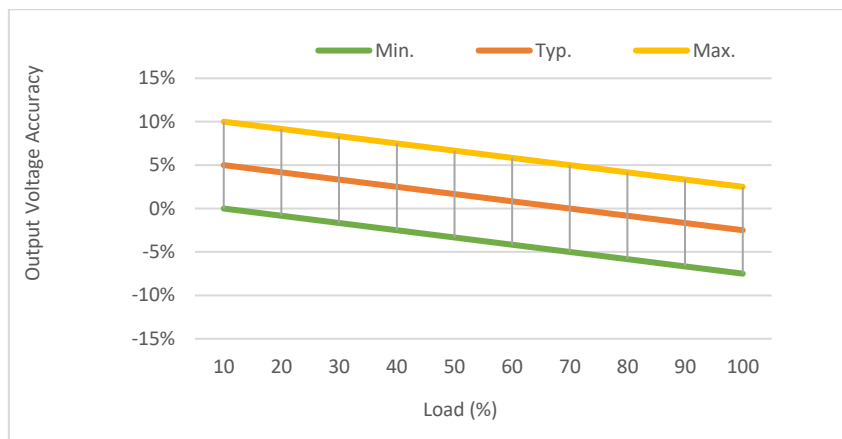

None 3.3V output models

Efficiency Curves

Efficiency vs Input Voltage

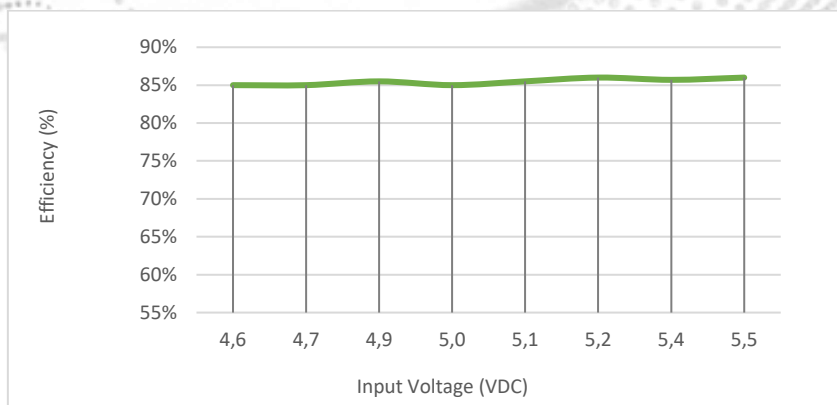


SDM01N, with full Load

1W, DC/DC Power Converter

SDM01N



Efficiency vs Load

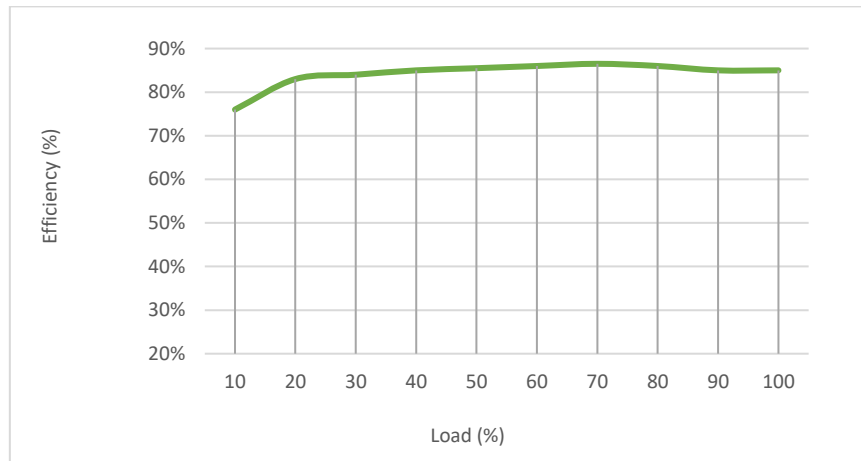

SDM01N, with nominal input voltage

1W, DC/DC Power Converter

SDM01N

Recommended External Circuit

Typical Application Circuit

*Typical application circuit is to further lower the input and output ripple. It is not required for general use.

*Recommended component specifications are typical values. Excessive external capacitive load may cause startup problem.

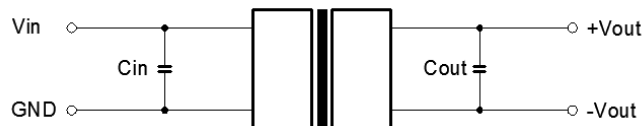


Figure 1: Typical External circuit

Recommended component spec

Input voltage	3.3, 5V	12V	15V	24V
C _{IN}	4.7uF, 16V	2.2uF, 25V	2.2uF, 25V	1.0uF, 50V

Recommended component spec

Output voltage	3.3, 5V	9V	12V	15V	24V
C _{OUT}	10uF, 16V	4.7uF, 16V	2.2uF, 25V	1uF, 25V	0.47uF, 50V

Circuit for EMC Enhancement

*Use this application circuit to meet Class B EMC performance.

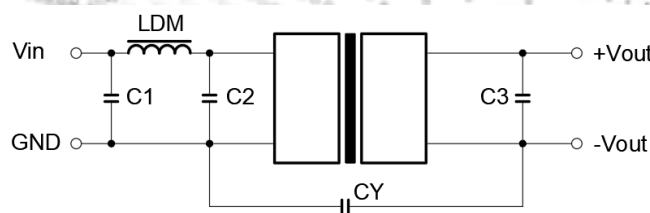


Figure 2: Circuit for EMC Enhancement

Recommended component spec

Component	LDM	C1, C2	CY
Spec	6.8uH	4.7uF, 50V	1nF, 2KV




*C₃ refer to C_{OUT} in

1W, DC/DC Power Converter

SDM01N



Mechanical Specifications

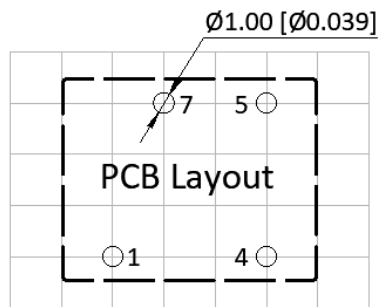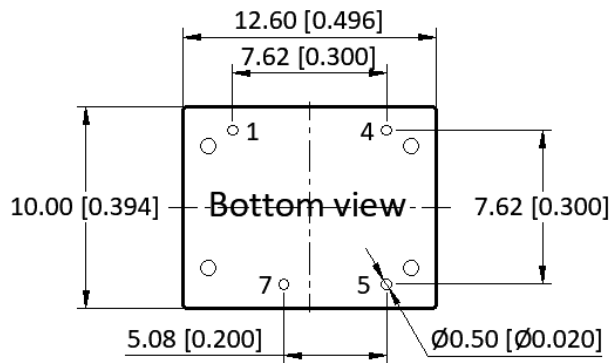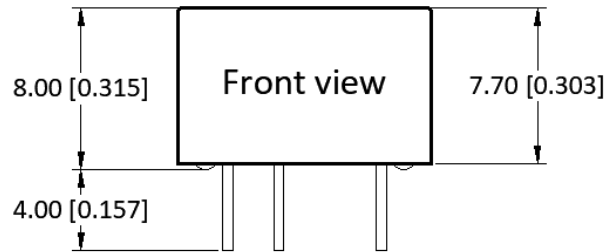

Pin Definition

Pin #	Single Out	
1	GND	
4	V _{IN}	
5	+V _{OUT}	
7	0V	

* Unless otherwise specified unit:
mm [inch]

* General tolerance: ± 0.50 [± 0.020]

* Pin thickness: ± 0.10 [± 0.004]

* Footprint grid 2.54 x 2.54 mm

1W, DC/DC Power Converter

SDM01N



Ordering information

Ordering can be done via www.summit-electronics.com or via info@summit-electronics.com. Please contact us for more information. Customisation of the product is available on request.

Technical support

For all product questions please contact us via info@summit-electronics.com

Document revision

Rev	Date	Changes
2025v0.1	27-08-2025	First issue of document