

6W, DC/DC Power Converter

SDV06D

SUMMIT
ELECTRONICS



Introduction

The SDV06D series are 1.5KV isolated 6Watt DC/DC converters with standard DIP24 footprint. Designed with high efficiency, they operate in a wide temperature range from -40°C to +85°C. Other features include wide 2:1 input voltage range, under voltage, over voltage, over current, and short circuit protections. These converters are ideally suitable for measurement equipment, telecom, wireless network, industrial control system, where isolated, tightly regulated voltages are desired.

Features

- Rated power: 6W Max
- Input voltage range 2:1
- Regulated single or dual out
- High efficiency up to 88%
- Isolation voltage 1.5KVdc
- Operating temperature range: -40 ~ +85°C ambient
- No external components required for operating
- RoHS compliant
- Six side metal shielding
- Compact DIP24 package
- Under voltage, over voltage, over current, and short circuit protection
- Designed to meet UL62368-1, IEC/EN62368-1
- 3 year warranty

6W, DC/DC Power Converter

SDV06D



Part numbers

Model Number	Input Voltage [VDC]			V _{OUT} [VDC]	Output Current [mA]		Efficiency [%] Typ.	Capacitive Load [uF] Max.
	Nom.	Range	*Max.		Max.	Min.		
SDV06D0505	5	4.5~9	12	5	1200	0	78	1000
SDV06D0512	5	4.5~9	12	12	500	0	84	470
SDV06D0515	5	4.5~9	12	15	400	0	84	220
SDV06D0524	5	4.5~9	12	24	250	0	84	100
SDV06D0505D	5	4.5~9	12	±5	±600	0	78	1000
SDV06D0512D	5	4.5~9	12	±12	±250	0	84	470
SDV06D0515D	5	4.5~9	12	±15	±200	0	84	220
SDV06D0524D	5	4.5~9	12	±24	±125	0	84	100
SDV06D1203	12	9~18	20	3.3	1500	0	75	1800
SDV06D1205	12	9~18	20	5	1200	0	80	1000
SDV06D1212	12	9~18	20	12	500	0	84	470
SDV06D1215	12	9~18	20	15	400	0	85	220
SDV06D1224	12	9~18	20	24	250	0	85	100
SDV06D1205D	12	9~18	20	±5	±600	0	80	680
SDV06D1212D	12	9~18	20	±12	±250	0	84	330
SDV06D1215D	12	9~18	20	±15	±200	0	85	220
SDV06D1224D	12	9~18	20	±24	±125	0	84	100
SDV06D2403	24	18~36	40	3.3	1500	0	78	1800
SDV06D2405	24	18~36	40	5	1200	0	82	1000
SDV06D2412	24	18~36	40	12	500	0	85	470
SDV06D2415	24	18~36	40	15	400	0	86	220
SDV06D2424	24	18~36	40	24	250	0	86	100
SDV06D2405D	24	18~36	40	±5	±600	0	83	680

6W, DC/DC Power Converter

SDV06D



SDV06D2412D	24	18~36	40	±12	±250	0	86	330
SDV06D2415D	24	18~36	40	±15	±200	0	87	220
SDV06D2424D	24	18~36	40	±24	±125	0	85	100
SDV06D4803	48	36~75	80	3.3	1500	0	79	1800
SDV06D4805	48	36~75	80	5	1200	0	83	1000
SDV06D4812	48	36~75	80	12	500	0	87	470
SDV06D4815	48	36~75	80	15	400	0	88	220
SDV06D4824	48	36~75	80	24	250	0	87	100
SDV06D4805D	48	36~75	80	±5	±600	0	83	680
SDV06D4812D	48	36~75	80	±12	±250	0	87	330
SDV06D4815D	48	36~75	80	±15	±200	0	85	220
SDV06D4824D	48	36~75	80	±24	±125	0	85	100

* Only typical models are listed. Other models may be available upon request.

* Input voltage exceed the Max. value may cause permanent damage.

* Standard models in SDV06D series are 1.5KV isolation single and dual outputs. See SDV06D series for 3KV isolation models.

6W, DC/DC Power Converter

SDV06D



Electrical characteristics

Unless otherwise indicated, specifications are measured at $T_A=25^{\circ}\text{C}$, nominal input voltage, full load after warm up.

Parameter	Condition	Min.	Type	Max.	Unit	Note
Input current Full load	$V_{IN, Nom} = 5V$	-	1428	-	mA	
	$V_{IN, Nom} = 12V$		607			
	$V_{IN, Nom} = 24V$		296			
	$V_{IN, Nom} = 48V$		147			
Input current No load	$V_{IN, Nom} = 5V$	-	10	-	mA	
	Others		7			
Reflected ripple current	$V_{IN, Nom} = 5V$	-	50	-	mA	
	Others		20			
Input voltage surge 1 second max	$V_{IN, Nom} = 5V$	-0.7	-	16	Vdc	
	$V_{IN, Nom} = 12V$	-0.7		25		
	$V_{IN, Nom} = 24V$	-0.7		50		
	$V_{IN, Nom} = 48V$	-0.7		100		
Startup input voltage	$V_{IN, Nom} = 5V$	-	-	4.5	Vdc	
	$V_{IN, Nom} = 12V$			9		
	$V_{IN, Nom} = 24V$			18		
	$V_{IN, Nom} = 48V$			36		
Input under voltage shutdown	$V_{IN, Nom} = 5V$	3.3	3.5	-	Vdc	
	$V_{IN, Nom} = 12V$	5.5	6.5			
	$V_{IN, Nom} = 24V$	13	15			
	$V_{IN, Nom} = 48V$	26	30			
Output voltage accuracy		-	± 1	± 3	%	
Output voltage balance Dual output with balanced load		-	± 0.5	± 1.5	%	

6W, DC/DC Power Converter

SDV06D



Line regulation Full load, $V_{IN} = V_{IN, Min}$ to $V_{IN, Max}$	Main output	-	± 0.2	± 0.5	%	
	Other output		± 0.5	± 1.0		
Load regulation $I_{OUT}=5\%$ to 100% of $I_{OUT, rated}$	Main output	-	± 0.5	± 1.0	%	
	Other output		± 0.5	± 1.5		
Temperature coefficient	Full load	-	-	0.03	%/°C	
Output ripple and noise 20MHz bandwidth, peak to peak		-	-	100	mV	
Cross regulation Dual output, $I_{OUT, main}=50\%$ of $I_{OUT, rated}$, $I_{OUT, other}=10\%$ to 100% of $I_{OUT, rated}$		-	-	± 5	%	
Dynamic load response $I_{OUT}=25\% \sim 50\% \sim 75\%$ of $I_{OUT, rated}$	Peak deviation**	-	± 5	± 8	% V_{OUT}	** $V_{OUT}=3.3V, 5V, \pm 5V$
	Peak deviation		± 3	± 5	% V_{OUT}	
	Recovery time		300	500	μS	
Output over voltage protection		110	-	160	% V_{OUT}	
Output over current protection		110	140	190	% I_{OUT}	
Output short circuit protection		Continuous, automatic recovery				

* Operating with less than 5% of rated load will not cause damage to the converters, but the performances data may not fall into the specifications, and stable operating is not assured.

6W, DC/DC Power Converter

SDV06D



General Specifications

Parameters	Condition	Min.	Typ.	Max.	Unit	Notes
Isolation voltage 1 minute, leakage current 1mA max.	I/P to O/P	1500	-	-	VDC	
Isolation resistance Tested at 500VDC	I/P to O/P	1000	-	-	M ohm	
Isolation capacitance 100KHz, 0.1V	I/P to O/P	-	1000	-	pF	
Switching frequency*	Full load	-	300	-	KHz	
Operating temperature	See “Derating Curve”	-40	-	+85	°C	
Storage temperature		-55	-	+125	°C	
Storage humidity	None condensing	5	-	95	%RH	PWM mode
Pin soldering temperature		-	-	300	°C	
Vibration		IEC/EN61373 – Category 1, Grade B				
Cooling method		Free air convection				
Case material		Aluminum alloy				
MTBF	MIL-HDBK- 217F	>1,000,000 Hours, T _A =25°C				
Design based on standards		UL/EN/IEC 62368-1				

6W, DC/DC Power Converter

SDV06D



Safety certifications		IEC/EN 62368-1
EMC		CISPR32, EN55032 Class B with external circuit IEC/EN61000-4-2, 3, 4, 5, 6
Size, and Weight		32 x 20 x 11.1 mm, 14g

* Switching frequency is measured at full load. The converter reduces the switching frequency at low load (less than 50% load) for better efficiency.

6W, DC/DC Power Converter


SDV06D



Characteristics Curves

Derating Curve


Output vs Ambient Temperature

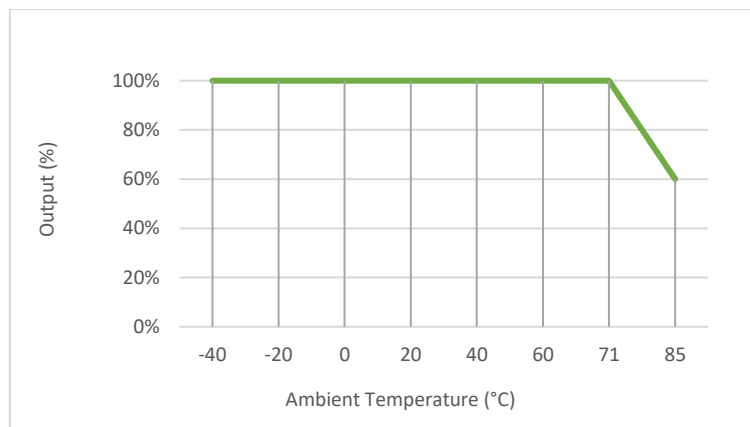

No heatsink

Efficiency Curve


Efficiency vs Input Voltage

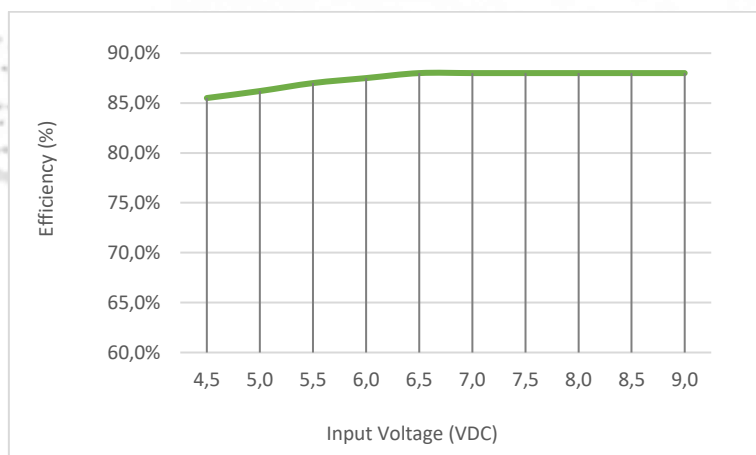

SDV06D0524, with full Load


6W, DC/DC Power Converter

SDV06D

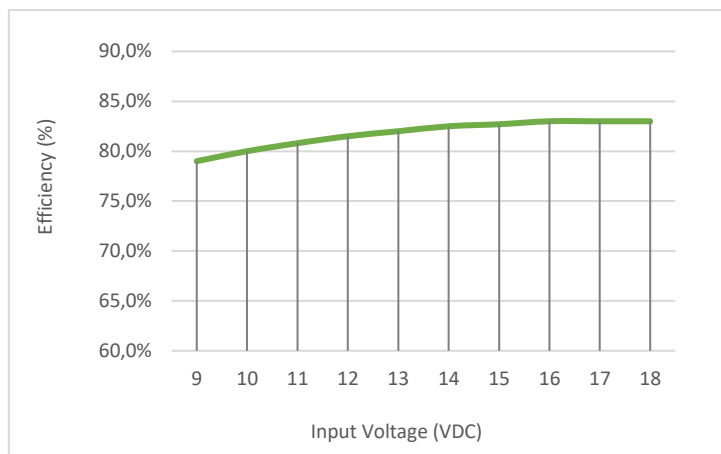

SDV06D1205D, with full Load


Efficiency vs Load

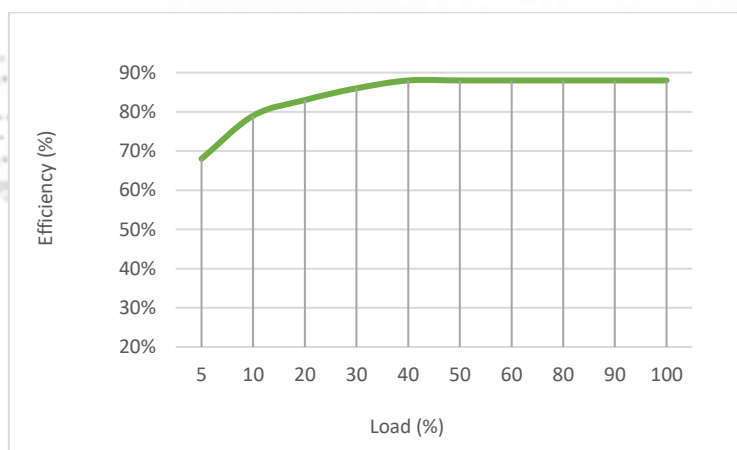

SDV06D0524, with nominal input voltage

6W, DC/DC Power Converter

SDV06D

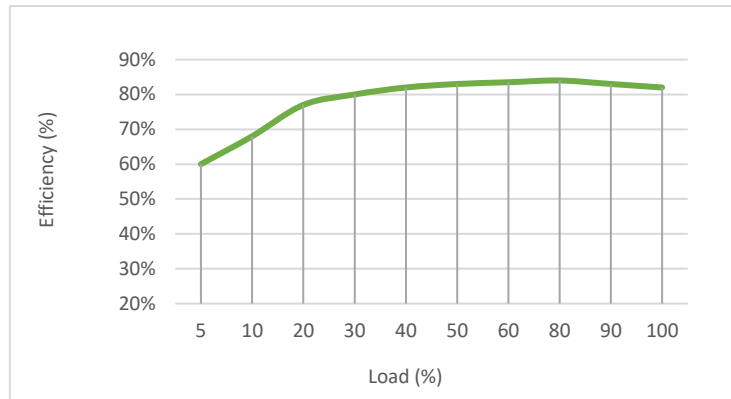

SDV06D1205D, with nominal input voltage

6W, DC/DC Power Converter

SDV06D



Recommended External Circuit

Typical Application Circuit

*Typical application circuit is to further lower the input and output ripple. It is not required for general use.

*Recommended component specifications are typical values. Excessive external capacitive load may cause startup problem.

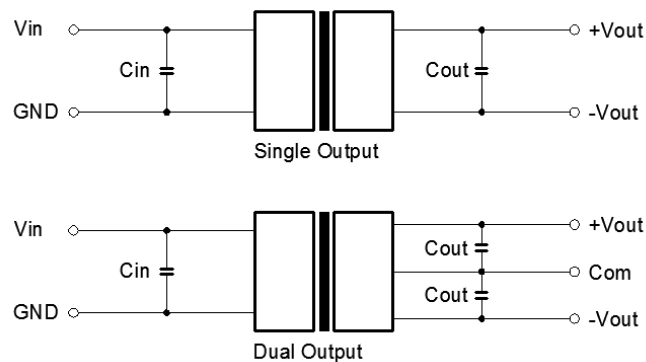


Figure 1: Typical External circuit

Recommended component spec

Input voltage	5, 12, 24V	48V
C_{IN}	100uF, 50V	10...47uF, 100V
C_{OUT}	10uF, 50V	

6W, DC/DC Power Converter SDV06D

Circuit for EMC Enhancement

*Use this application circuit to meet Class B EMC performance.

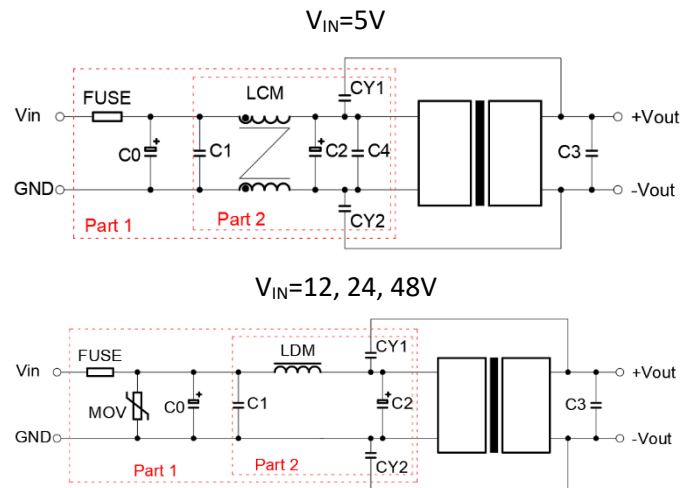


Figure 2. Circuit for EMC enhancement

Recommended component spec

Component	MOV	LCM / LDM	C0	C1	C2	C4	CY1, CY2
$V_{IN}=5V$	-	2.2mH	2200uF, 35V	4.7uF, 50V	4.7uF, 50V	100uF, 35V	2.2nF, 2KV
$V_{IN}=12V$	14D330K	4.7uH	1000uF, 35V	1uF, 50V	100uF, 35V	-	1nF, 2KV
$V_{IN}=24V$	20D470K	4.7uH	1000uF, 50V	1uF, 50V	100uF, 50V	-	1nF, 2KV
$V_{IN}=48V$	14D101K	4.7uH	680uF, 100V	1uF, 100V	100uF, 100V	-	1nF, 2KV


* "Fuse" to be selected according to application needs. "C3" refer to relative C_{OUT} values in Table 1.

6W, DC/DC Power Converter

SDV06D



Mechanical Specifications

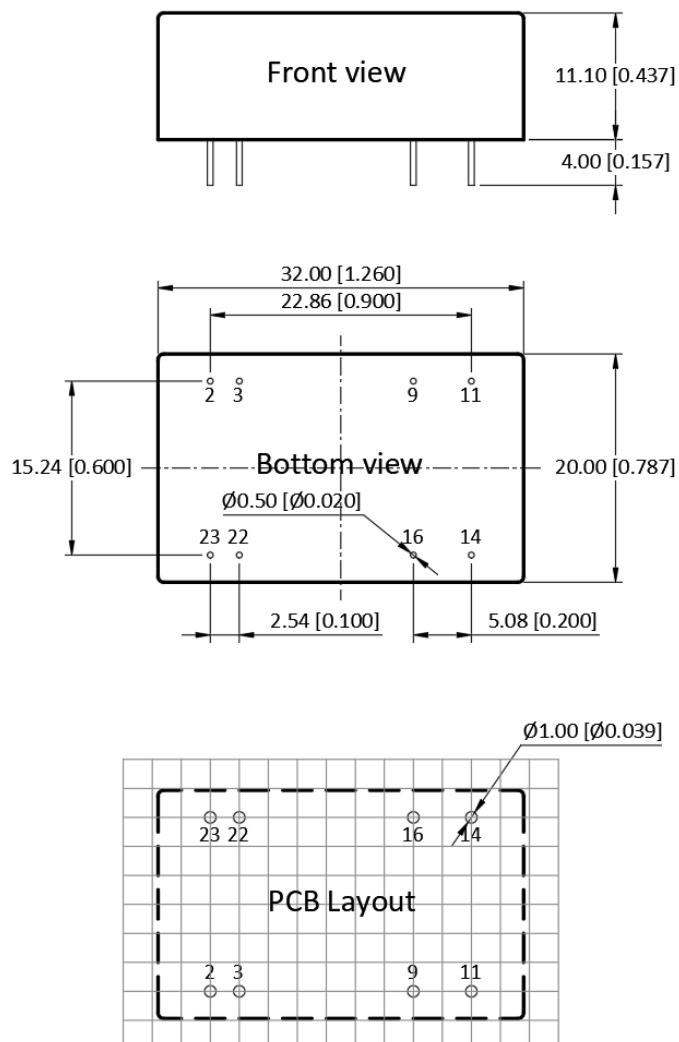

Pin Definition

Pin #	Single Out	Dual Out
2, 3	GND	GND
9	No pin	COM
11	No connection	-V _{OUT}
14	+V _{OUT}	+V _{OUT}
16	0V	COM
22, 23	V _{IN}	V _{IN}

* Unless otherwise specified unit:
mm [inch]

* General tolerance: ± 0.50 [± 0.020]

* Pin thickness: ± 0.10 [± 0.004]

* Footprint grid 2.54 x 2.54 mm

6W, DC/DC Power Converter

SDV06D



Ordering information

Ordering can be done via www.summit-electronics.com or via info@summit-electronics.com. Please contact us for more information. Customisation of the product is available on request.

Technical support

For all product questions please contact us via info@summit-electronics.com

Document revision

Rev	Date	Changes
2025v0.1	26-08-2025	First issue of document