



Schematic:

REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2023/02/02	

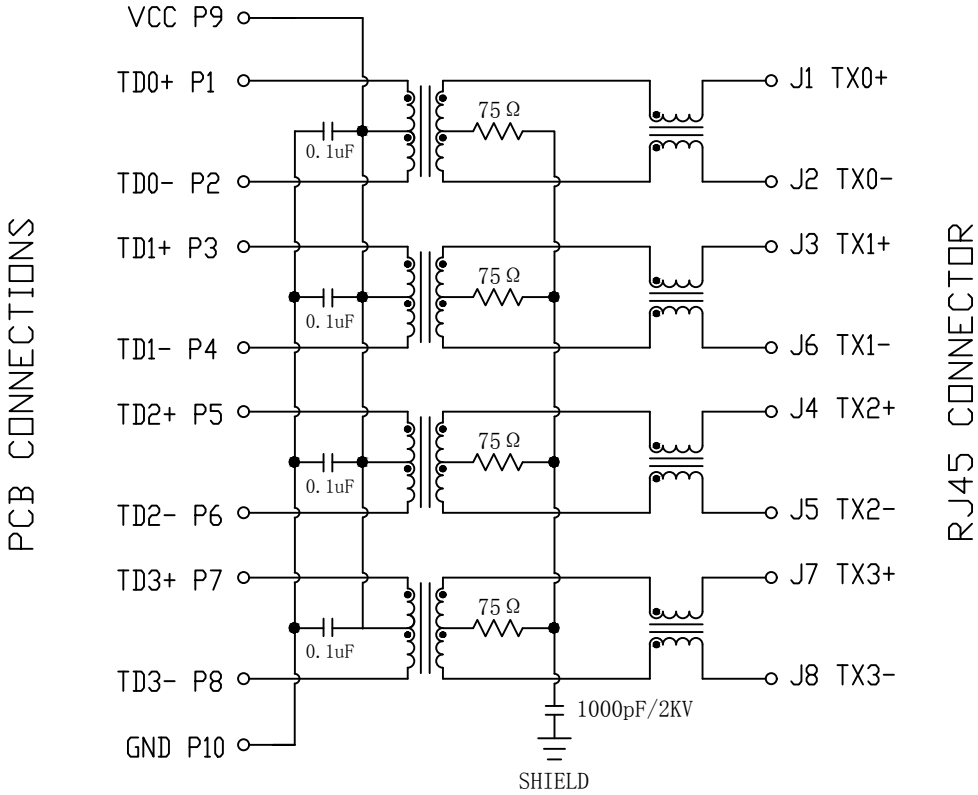

- ELECTRICAL SPECIFICATIONS @25°C
- Turn Ratio : 1CT:1CT +/- 5%
 - OCL: 200uH Min @100KHz , 0.1V
 - Insertion Loss (dB Max):
1-100MHz: -1.0 100-125MHz: -1.5
 - Return Loss(dB Min):
1-30MHz: -16 30-100MHz: -12
100-150MHz: -10
 - Cross Talk:
1-125MHz: -25dB Min.
 - Common Mode Rejection(dB Min):
1-125MHz: -30
 - Common Mode to Differential Mode Rejection(dB Min):
1-100MHz: -30 100-125MHz:-25.
 - Isolation Hi-Pot: 2250VDC Min@ 60S
 - Operating Temperature Range: -40°C~+85°C.



Emitting Color	λ_p (nm)	V _F @I _F =20mA	I _R @V _R =5V
GREEN	565	1.8~2.4V	10 μ A max
YELLOW	585	1.8~2.4V	10 μ A max

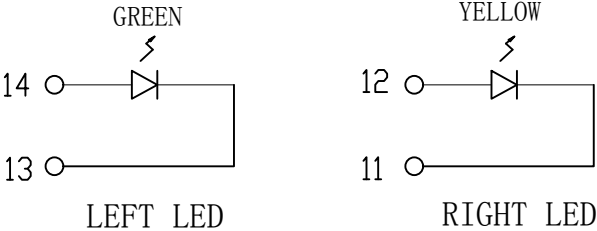


X:X ±0.30	APPD: TOM	Summit Electronics BV		
X:XX ±0.25	CHKD: JAMES			
X:XXX ±0.05	DR: LEO	TITLE: RJ45 Transformer & 2×6. 2.5G Base-T W/LED		
ANGLES ±1°	UNIT: mm [Inches]	PART NO. : SRJ206250010		
	SCALE: 2/1	SHEET: 1/2	REV: A	DWG NO. :

Mechanical:

REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2023/02/02	

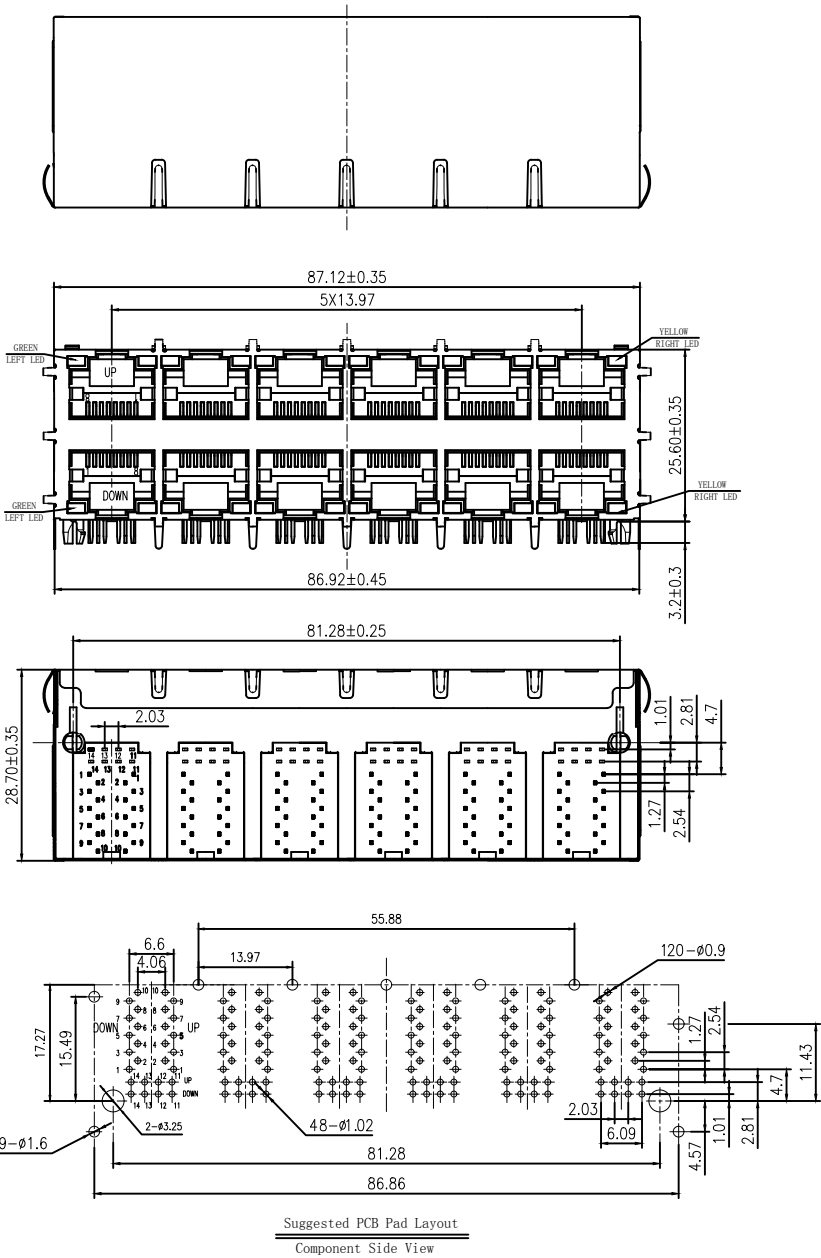


Recommend Plug Dim



NOTES:

1. Designed to support application, such as SOHO (ADSL modems), LAN-on-Motherboard (LOM), hub and Switches.
2. Meets IEEE 802.3 specification
3. Connector Materials:
Housing: Thermoplastic UL94V-0
Contact/Shield: Copper alloy
Shield plating: Nickel
Contact plating: Gold 6 micro-inches min. In contact area.
4. Wave solder tip temperature: 265°C Max, 5 Sec.
- 5.

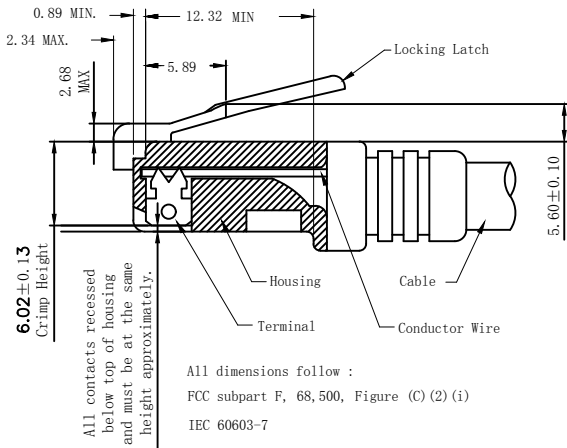

All dimensions follow :
FCC subpart F, 68, 500, Figure (C) (2) (i)
IEC 60603-7

STANDARD MODULAR PLUG ASSEMBLY



X:X	± 0.30	APPD:	TOM	Summit Electronics BV	
X:XX	± 0.25	CHKD:	JAMES		
X:XXX	± 0.05	DR:	LEO	TITLE: RJ45 Transformer & 2x6. 2.5G Base-T W/LED	
ANGLES	$\pm 1^\circ$	UNIT:	mm [Inches]	PART NO. :	SRJ206250010
		SCALE:	2/1	SHEET:	2/2
		REV:	A	DWG NO. :	